



# 902-928MHz 9dBi RFID 圆极化天线(带腔体)

电气指标: Electrical Specifications	
型号 Model	ANTRFIDD9Y65SJQT
频率范围(FreqRange)	902-928 (866 ± 5) MHz
增益(Gain)	9dBi
水平波瓣宽度(Horizontal Beamwidth)	65°
垂直波瓣宽度(Vertical Beamwidth)	65°
前后比(F/B Ratio)	≥20dB
驻波比(VSWR)	≤1.3
阻抗(Impedance)	50 Ω
最大功率(Max. Power)	50W
极化方式(Polarization)	圆极化
接头型号(Connector)	SMA-J
防雷保护( Lightning Protection)	直流接地
机械指标: Mechanical Specifications	
尺寸 mm(Dimension)	260x260x90mm
重量 kg (Weight)	2.5kg
抗风强度(Rated Wind Velocity)	36.9 m/s
反射板材料 ( Reflector material)	铝
天线罩颜色(Radome Color)	白色
天线外罩材料 (Radome material)	ABS
工作温度(Operating temperature)	-40~55℃

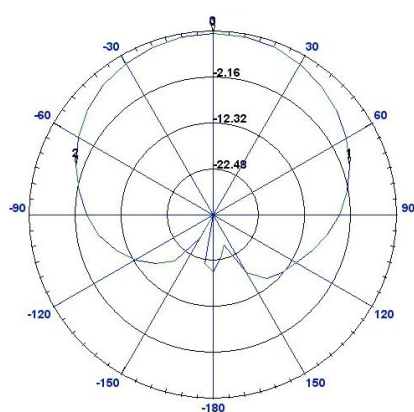

H-Plane

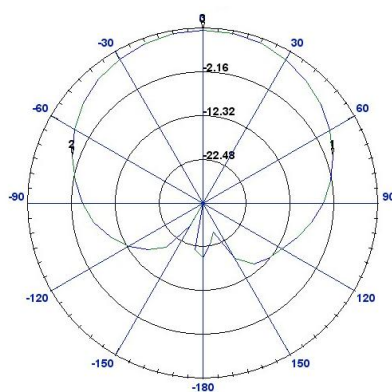

E-Plane